


Specifications

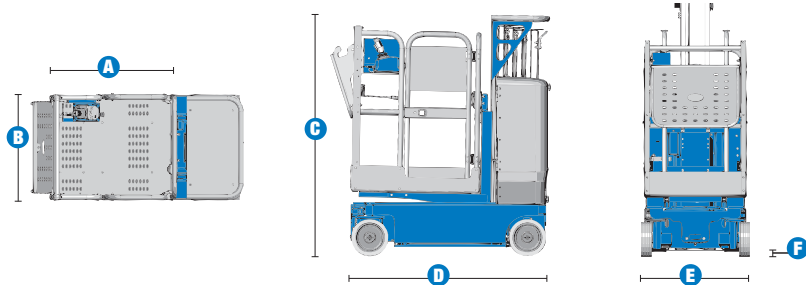

MODELS	QST™-12		QST™-15		QST™-20	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height*	17 ft 4 in	5.28 m	20 ft 10 in	6.35 m	25 ft 9 in	7.85 m
Platform height	11 ft 4 in	3.45 m	14 ft 10 in	4.52 m	19 ft 9 in	6.02 m
A B Platform dimensions (length x width)						
With tray down	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m
With tray up	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m
C Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m	6 ft 6 in	1.98 m
D Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
E Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m	2 ft 7.5 in	.80 m
F Ground clearance - center	2.5 in	.06 m	2.5 in	.06 m	2.5 in	.06 m

PRODUCTIVITY						
Lift capacity	500 lbs	227 kg	500 lbs	227 kg	350 lbs	159 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		30%	
Turning radius - inside	zero		zero		zero	
- outside	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m
Raise / lower speed	20 / 18 sec	20 / 18 sec	21 / 19 sec	21 / 19 sec	24 / 21 sec	24 / 21 sec
Controls	24V DC proportional		24V DC proportional		24V DC proportional	
Tires - solid non-marking	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm

POWER						
Power source	24V (four 6V 200 Ah maintenance-free batteries)					
Hydraulic system capacity	2.2 gal		8.33 L			

WEIGHT***						
Retail (R) configuration	1,609 lbs	730 kg	2,220 lbs	1,007 kg	2,479 lbs	1,124 kg
Warehouse (W) configuration	1,581 lbs	717 kg	2,192 lbs	994 kg	2,451 lbs	1,112 kg

STANDARDS COMPLIANCE	ANSI A92.6, CSA B354.2, EN 280					
----------------------	--------------------------------	--	--	--	--	--

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

*** Weight will vary depending on options and/or country standards.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM

- Stockpicker platform with dual side entry gates and front folding tray

POWER

- 24V (four 6V 200 Ah maintenance-free batteries)

TIRE

- Non-marking solid tires

PRODUCTIVITY (Retail configuration only)

- Dual flashing beacons
- Obstruction sensing pad

STANDARD FEATURES

MEASUREMENTS

QS™-12R & QS™-12W

- 17 ft 4 in (5.28 m) working height
- 11 ft 4 in (3.45 m) platform height
- Up to 500 lb (227 kg) lift capacity

QS™-15R & QS™-15W

- 20 ft 10 in (6.35 m) working height
- 14 ft 10 in (4.52 m) platform height
- Up to 500 lb (227 kg) lift capacity

QS™-20R & QS™-20W

- 25 ft 9 in (7.85 m) working height
- 19 ft 9 in (6.02 m) platform height
- Up to 350 lb (159 kg) lift capacity

STANDARD FEATURES

PRODUCTIVITY

- Stockpicker platform with dual side entry gates and front folding tray
- Stockpicker rear parcel tray (QS™-12 & QS™-15, ANSI only)
- Auxiliary platform lowering
- Low 15.5 in (0.39 m) platform entry height
- Patented rigid mast system
- Enclosed platform cables
- Compact base 29.5 x 53 in (0.75 x 1.35 m) (QS™-12 & QS™-15 only)
- Fully proportional lift and drive controls
- Battery charge indicator
- On-board diagnostic system
- AC power to platform
- Descent and tilt alarm
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear ABS covers for easy access to all major electrical and hydraulic components
- Tie down attachment points
- Overhead crane attachment point
- Large forklift pockets access
- Flashing beacons (Retail configuration only)
- Obstruction sensing pad (Retail configuration only)

POWER

- Automatic 25 amp battery charger
- Maintenance-free batteries
- 6 ft (1.8 m) charger cord



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Dual bike hooks
- Motion alarm

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730

Telephone **+1 (425) 881-1800**
Toll Free in USA/Canada **+1 (800) 536-1800**
Fax +1 (425) 883-3475

Genie Europe

The Maltings
Wharf Road
Grantham NG31 6BH
UK

Telephone **+44 (0)1476 584333**
Fax +44 (0)1476 584334

Email: AWP-InfoEurope@terex.com

Distributed By:

Effective Date: April, 2011. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie is a Registered Trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Brand. © 2011 Terex Corporation.